






Key code
See table #1



Table 1: Housing color and key code

Part no.	Insulator color	Key code	Mating plug part no.
TAK-A4MDGBA-AFZ+ VXTAK27355	Black		TAK-A4SFCGB-AAZ+ VXTAK27168
TAK-A4MDGAA-BFZ+ VXTAK27354	Blue		TAK-A4SFCGA-BAZ+ VXTAK27271
TAK-A4MDGCA-CFZ+ VXTAK27356	Brown		TAK-A4SFCGC-CAZ+ VXTAK27269
TAK-A4MDGGA-DFZ+ VXTAK27357	Green		TAK-A4SFCGG-DAZ+ VXTAK27273

Recommended P.C.B layout
P.C.B thickness: 1.2mm~1.6mm
(Connector side)

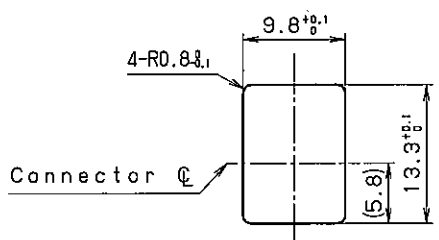


Panel opening size
(Recommended panel thickness: 1.0mm)

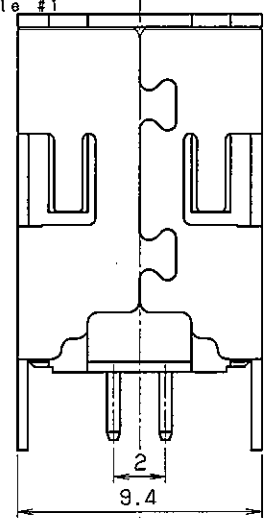

Material code

RoHS compliant



Recommended connector arrangement

△			3	Shell	Stainless steel	1	Nickel plating			
△			2	Contact	Copper alloy	4	Gold plating			
△			1	Insulator	PBT	1				
LTR.	DATE	BY	REV.	DESCRPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	DATE		SCALE		UNIT					
	Jul.24.2013		5/1		mm (INCH)	3RD. A. P				
	APP. DATE&REV.									
DR.	DE.	CHK.	CHK.	APP.	NAME		4 pos. board receptacle connector for application-USB (RoHS)			
T. KAWANO	T. KAWANO	K. HASUMI		K. HOMMA	PART NO.	TAK-A4MDG () A- () FZ+		REV.		